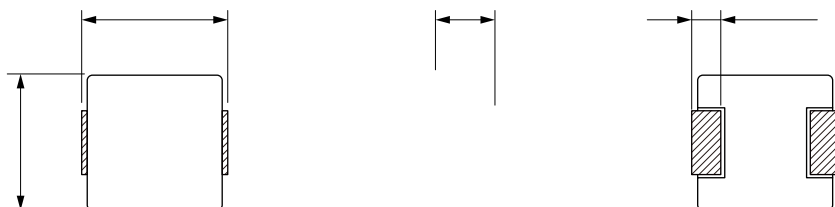


MD Series

MD7024-R10N	0.10
MD7024-R15N	0.15
MD7024-R22M	0.22
MD7024-R33M	0.33
MD7024-R36M	0.36
MD7024-R47M	0.47
MD7024-CHARACTERISTICS	
MD7024-R68M	0.68
MD7024-R82M	0.82
MD7024-1R0M	1.00
MD7024-1R5M	1.50
MD7024-2R2M	2.20
MD7024-3R3M	3.30
MD7024-4R7M	4.70
MD7024-5R6M	5.60
MD7024-6R8M	6.80
MD7024-8R2M	8.20

CHARACTERISTICS

KOHER Electronics
F9, No. 4188, Huanning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com

[illegible]

		Tolerance	Temperature Rise Current Typ. (A)			
MD7024-100M	10.0	±20%	3.2	5.0	92	101
MD7024-150M	15.0	±20%	2.5	3.5	150	180
MD7024-220M	22.0	±20%	1.8	3.0	185	215

Operating temperature : -40℃ ~ +125℃

Temperature rise current : The actual value of DC current when the temperature rise is $\Delta T 40^{\circ}\text{C}$

Saturation Current will cause L to drop approximately 30%

