

MDSA Series







FEATURES

- {1ΠΣΡΣΣΣ ΌύΩσúοΉΌΓύΩ
-
-
- ΣΡúο† ΡύΧ οΉaa ΩύΩσ\$ ΣΉ\$ úú ΌύΨμúσú\$ ΌύΩσúοΉΌΓύΩ
-
- !9/ v ξΉ†ΠúΣΣ
- ημ\$ο†Γ° ú\$Ψμ\$ο†úΉo\$ úú / ΩΌΡΉΣΩ° σ\$Ρú ú\$Ψμ\$ο†úΉo\$ oΩσ\$
- vΉ†ΩΓύbl t / {

APPLICATION





- Ι\$†Σ†Ψμσ ú†ΠΡ†Ψμσ †ΩΣ ΩΩú\$οΩúo ΡΩ°†Γ°
-
- 5úúoσ ΧΩΣúΧ ΡΩ~ †ΩΣ σ\$†ú ΌύΩúoúΡ
-
-
- ΛΩ °\$ΉΌΡ\$ ΛΩúúú†ΩΨ\$Ωú †ΩΣ Ω†Φ° †ΓúΩ




Part No	Inductance @ 100KHz/1V	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Current Typ. (A)	Current Max. (A)	DC Resistance Typ.	DC Resistance Max.
a5{! w a								
a5{! w a								
a5{! w a								




--	--	--	--	--	--

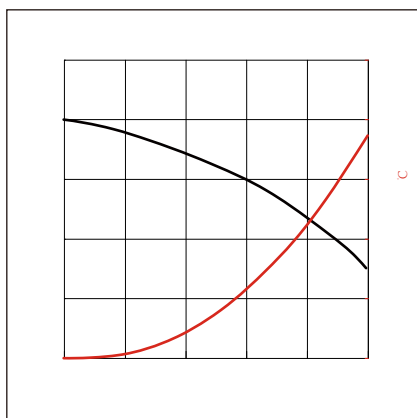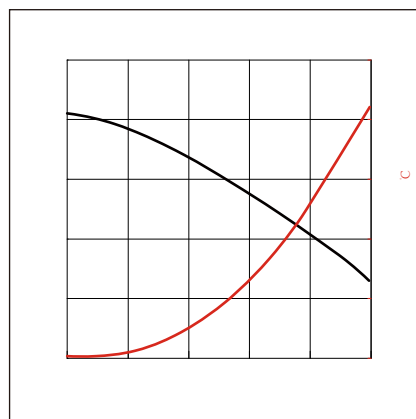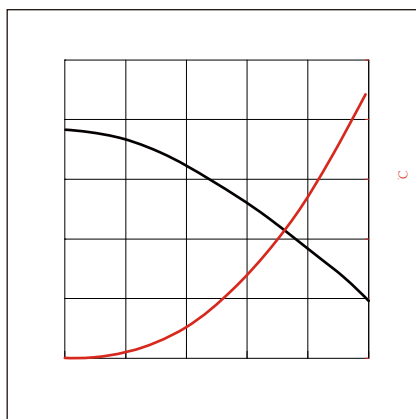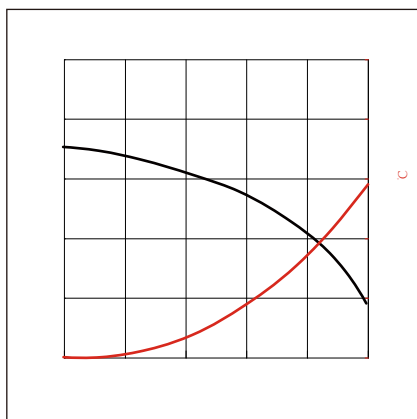

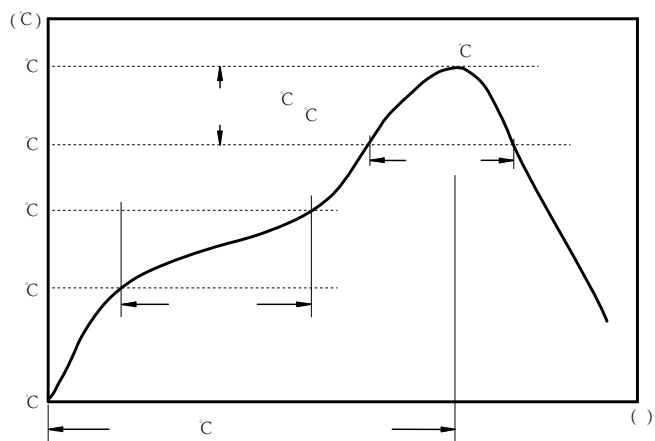


C
C
C

:

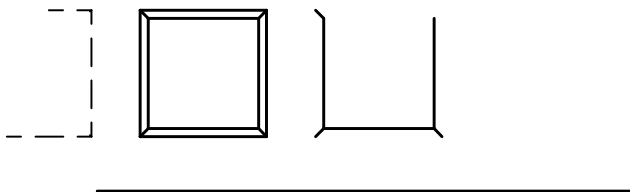

MDSA4020	4.5 ± 0.1	4.85 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.3	2.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05





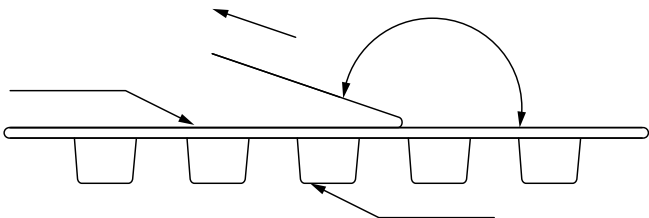


The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	K+Printing Inductance)
---------	------------------------



:

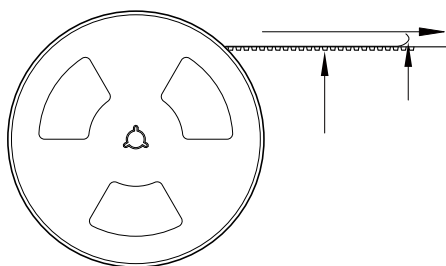

3000 Pcs/Reel

3 Reel /Inner box(9000 Pcs)

3 Inner box/Carton box(27K Pcs)

:

•

•

•

•

•

•

•

•