



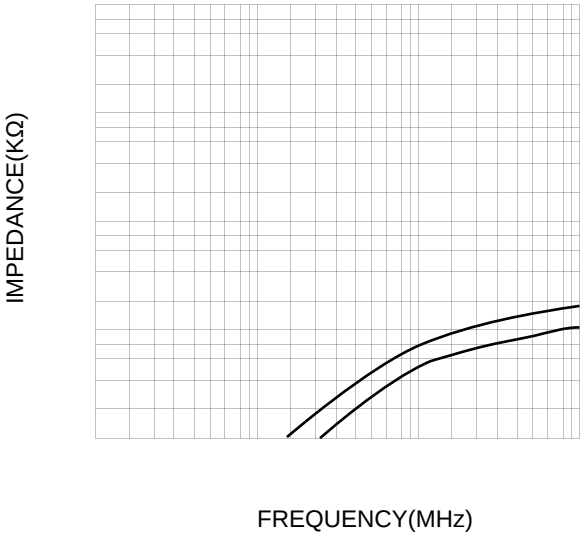


Part No	Inductance	Tolerance	Q Min.	Test Frequency	SRF Min.	DCR Max.	Temperature Rise Current Max.
MI0805-1R2K	1.2	10%	45	10	65	0.5	50
MI0805-1R5K	1.5	10%	45	10	60	0.5	50
MI0805-1R8K	1.8	10%	45	10		0.6	50
MI0805-2R2K	2.2	10%	45	10	50	0.65	30

Operating Temperature: -55℃ ~ +125℃

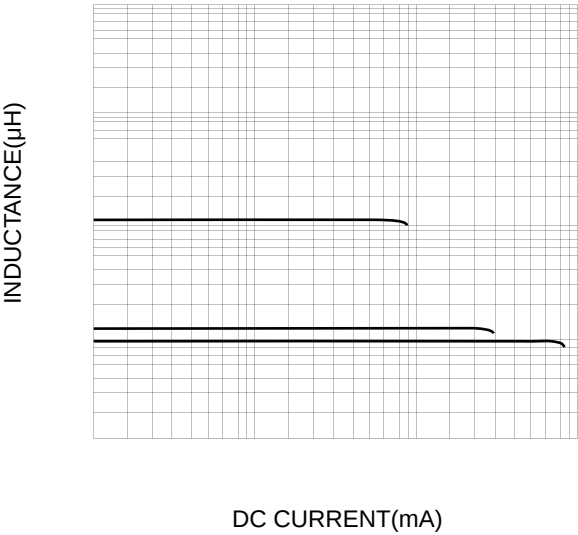


INDUCTANCE(μH)

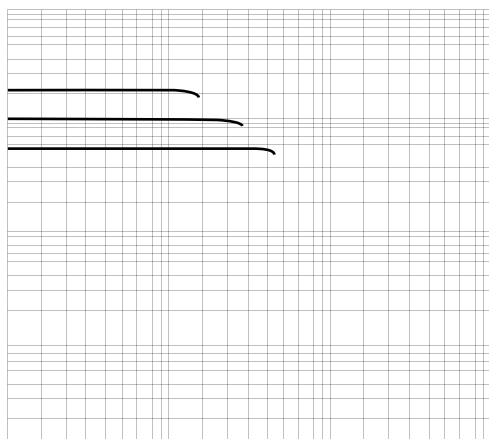

DC CURRENT(mA)

IMPEDANCE($\text{k}\Omega$)

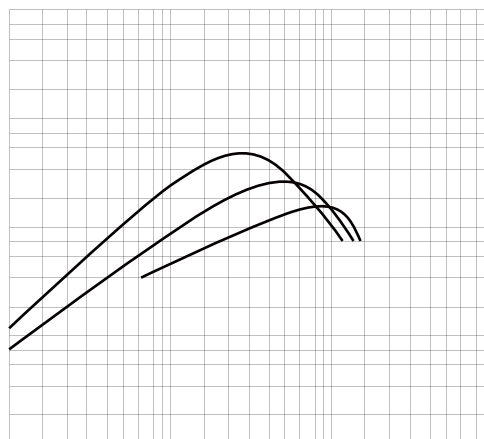

FREQUENCY(MHz)