



SMD Power Inductors For Automotive
Size 3015B

1	л	▪ Magnetic shield type wound induct
2		▪
3		▪
4		▪
5		▪
6		▪ Quantity: 2000pcs
7		▪

Dimensions: [mm]





Land Pattern: [mm]

Electrical Properties:





Typical Electrical Characteristics:

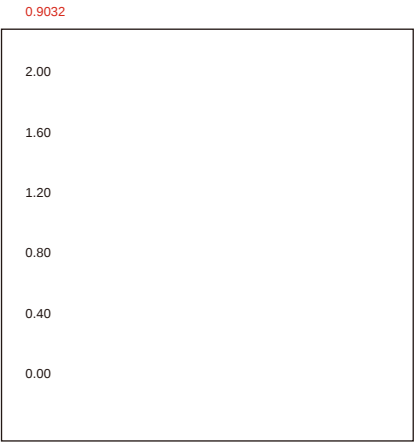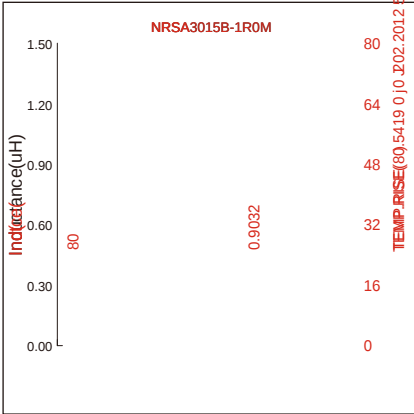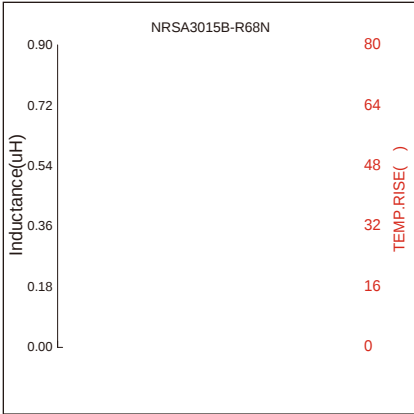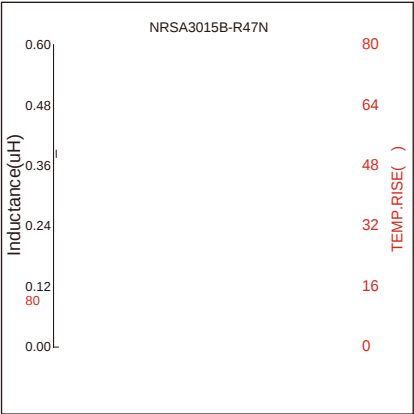

T 2521 T(T) TBE TO 5527SQ0.3 0.165 0.2521 T(T) TBE TO

Soldering Reflow:


Packaging Information:

Tape Dimension :



Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
NRSA3015B	3.2±0.1	3.2±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	1.7±0.1	1.75±0.1	0.30±0.05

Peel force of top cover tape:

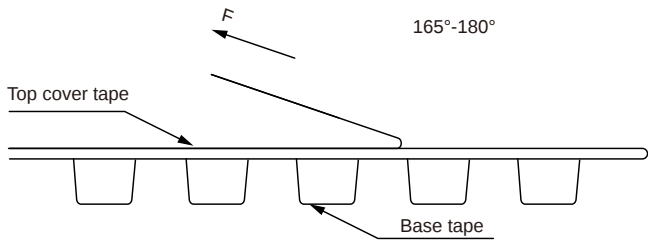

The peel force of top cover tape shall be between 0.3 to 1.17 N

Operation Instr

Reel Dimension : [mm] 3FFH 00FS0 1D 00FS0 1F0 01 02 1CB 1F0 W19x19D

Packaging Quantity: